


CONFIDENTIAL

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT IS THE PROPERTY OF MAGNUM AUSTRALIA. IT SHALL NOT BE USED OR REPRODUCED OR ITS CONTENTS DISCLOSED IN WHOLE OR PART WITHOUT THE EXPRESS WRITTEN CONSENT OF MAGNUM AUSTRALIA/MAGNUMEQUIPT PTY.LTD.

Visit us at www.magnumaustralia.com

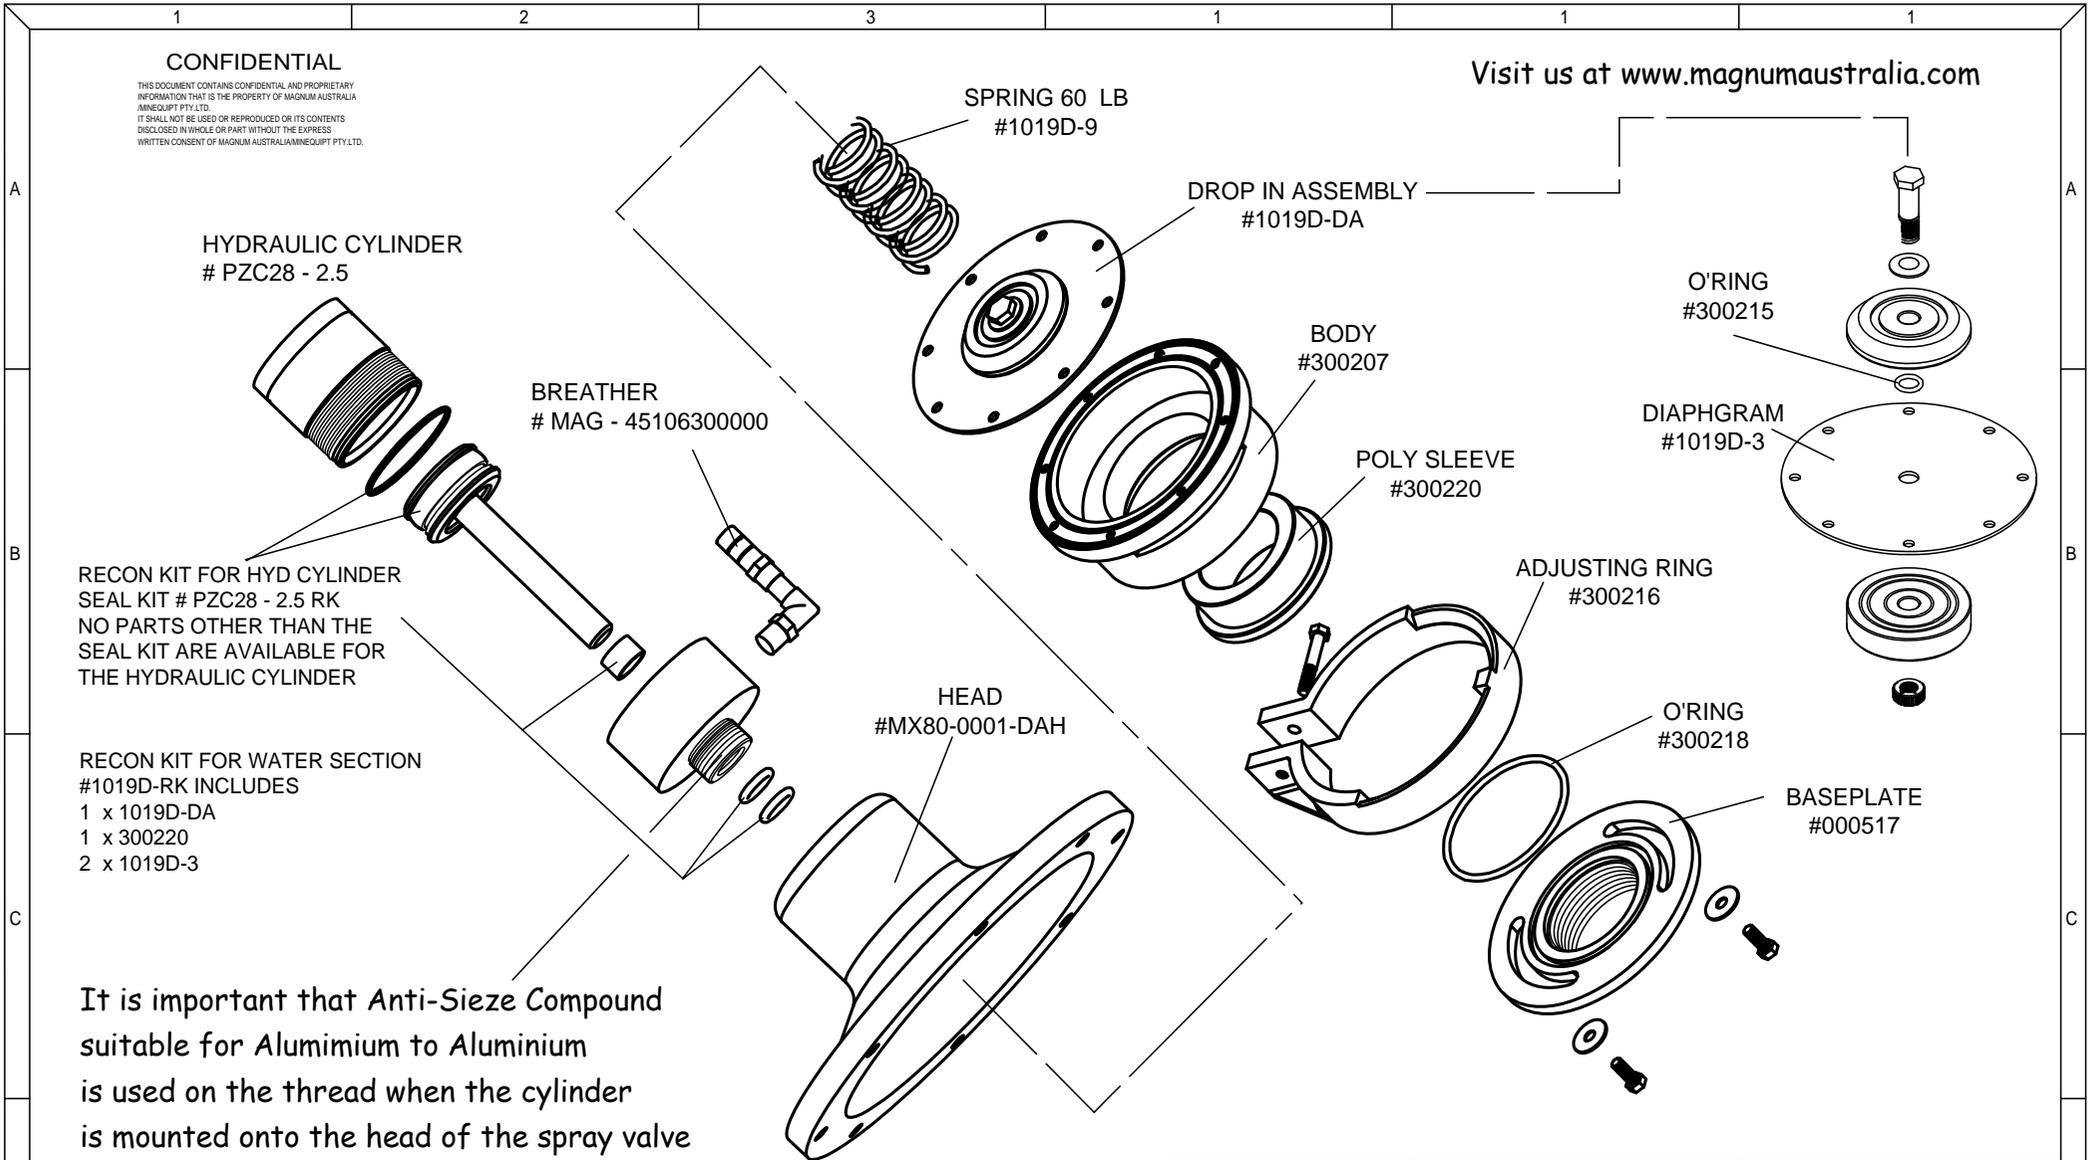

It is important that Anti-Sieze Compound suitable for Alumimium to Aluminium is used on the thread when the cylinder is mounted onto the head of the spray valve

ISSUE					REVISION					DRAWN	DATE	APPD.	EXCEPT WHERE NOTED ALL DIMENSIONS IN MILLIMETRES			DRAWN TO AS 1100		SURFACE FINISH		MATERIAL :			
DRAWINGS SUBJECT TO FINAL DESIGN UNLESS CONFIRMED													SHEET SIZE: A4		TOLERANCES UNLESS NOTED			SCALE		ASSEMBLY / SPARE PARTS 1019 - SA - H - MK2			
CONFIRMED BY: SIGNATURE: DATE:																WHOLE DIMENSIONS ±0.50 ONE DECIMAL PLACE ±0.25 TWO DECIMAL PLACES ±0.10 ANGLES ±30'			DRAWN NML DATE 13/10/2011		35 PARKHURST DRIVE, KNOXFIELD, VICTORIA 3180 PHONE (03) 9801 8433 FAX (03) 9800 3240 Contact us on tanks@magnumaustralia.com		
													SHEET 1 OF 1 SHEETS			DRG. No. 1019 - SA - H - MK2		ASSEMBLY / SPARE PARTS 1019 - SA - H - MK2 80 mm HYDRAULIC SINGLE ACTING SPRAY VALVE					