


Mini Spray Valve Hydraulic Operated

- DOUBLE ACTING MMV/B – DA – H – MK2

- Weighs just 3 kilograms (7lbs)
- Compact design and shape for fast and easy installation - see dimensions
- Manufactured from marine grade alloy
- Low maintenance polymer inserts control the water valve operation
- Fits to any existing piping configuration from 40mm (1.5") nominal bore.
- Hydraulic Cylinder Port Size 9/16" UN ORing
- Eliminates the need for additional water control valves (ball, butterfly, knife)
- Supplies a flat, dense and variable spray pattern
- Provides an even fan spray throughout the entire spray pattern
- Manually adjustable spray pattern via a fitted adjustable ring
- Can control output water flow from 0 - 450 l/min (approx)
- Up to 12 metre distance spray throw
- Up to 11 metre spray width
- Operating Hydraulic Pressure must be limited to 40 bar (600 PSI)
- 360° adjustable swivel rotation
- Camlock mounting design for efficient changeover and adjustment
- 0 - 90° manually controlled fan width spray setting
- S/steel spring and fasteners
- Water pressure opens the valve
- Hydraulic pressure controls closing of the valve
- Spring pressure keeps valve closed when hydraulic pressure not present and pump not operating
- Can use electric or RF cabin switching to control valve operation
- Designed to fit to the Magnum MM40 and RM40 water monitors
- Valves are fully pressure tested prior to packaging
- Serial numbered and engraved with unique identification for traceability
- Full warranty on parts
- Spare parts readily available and fully serviceable

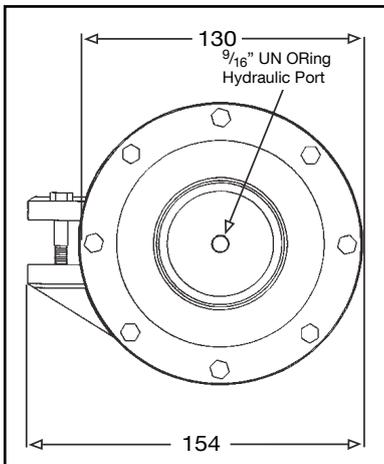

mini spray valve – double acting

MMV/B – DA – H – MK2