
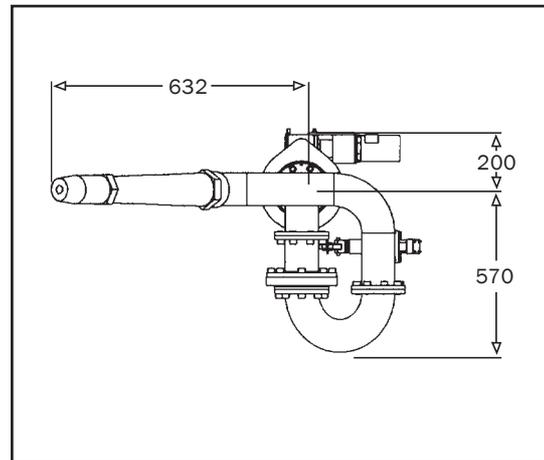
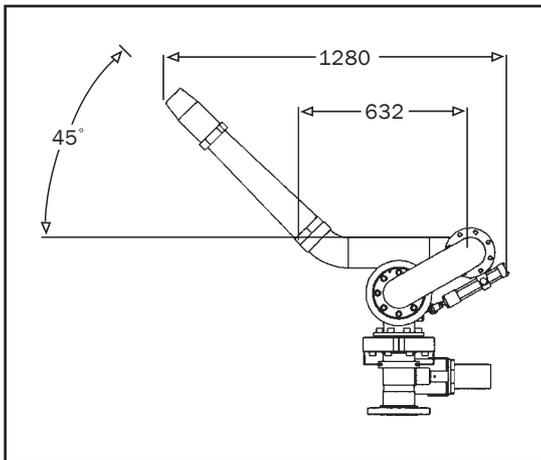


RM100 - Hydraulic Driven Remote Monitor

- Easy installation
- Pressure tested to 3000 kpa
- 100mm (4") ANSI 150lb flanged inlet connection
- Electric joystick cabin control supplied as standard
- Radio Frequency (R.F.) joystick control - optional
- Full automation via sequencing or PLC technology - can retro fit as optional
- Engineered balanced and compact design - see dimensions
- Direct gear drive offering up to 360° precision slew operation
- Hydraulic cylinder controlling 75° angle elevation
- Changeover to hand wheel manual override if required
- Designed for mobile or fixed mounted applications
- Optional "power pack" system or can control via vehicle hydraulics
- Patented "non-flog" Magnum® Australia swivel bearings
- Automatic grease lubrication fitted
- Director nozzle supplied as standard with selection of orifice tips 32mm-64mm (1 ¼" - 2½") diameter of orifice
- All s/s fasteners and protective guard components
- 12 month product warranty
- Spare parts readily available
- Fully serviceable

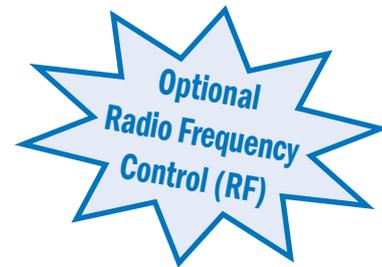

hydraulic driven remote monitor RM100