
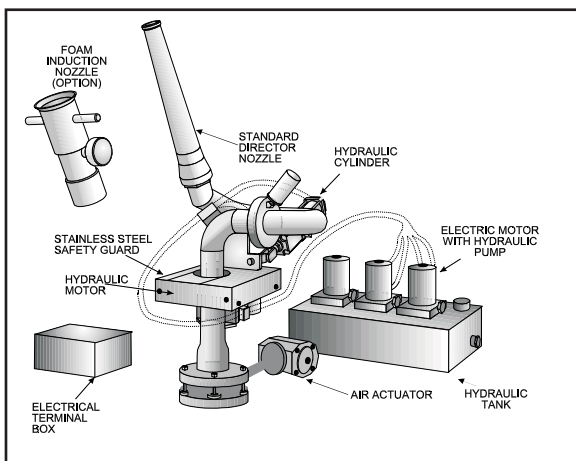
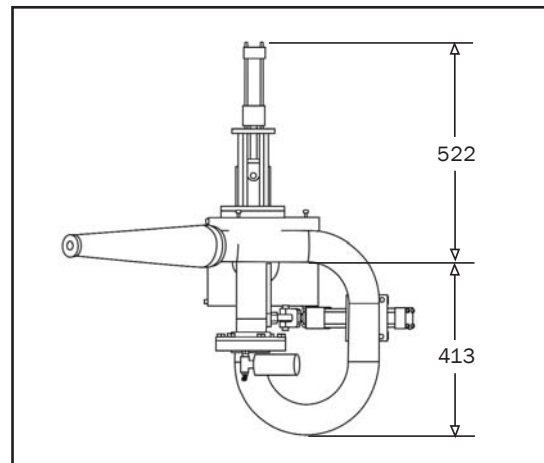


# RM80 - Hydraulic Driven Remote Monitor

- Easy installation
- Pressure tested to 3000 kpa
- 80mm (3") ANSI 150lb flanged inlet connection
- Electric joystick cabin control supplied as standard
- Radio Frequency (R.F.) joystick control - optional
- Full automation via sequencing or PLC technology - can retro fit as optional
- Engineered balanced and compact design - see dimensions
- Direct gear drive offering up to 360° precision slew operation
- Hydraulic cylinder controlling 75° angle elevation
- Designed for mobile or fixed mounted applications
- Optional "power pack" system or can control via vehicle hydraulics
- Fog/jet nozzle available as option
- 3% foam induction on fog/jet nozzle available as option
- Patented "non-flog" Magnum® Australia swivel bearings
- Automatic grease lubrication fitted
- Accepts Magnum 316 s/s fog nozzle for adjustable fan spray
- Optional 3% foam induction nozzle available for fire applications
- Director nozzle supplied as standard - 28mm (1 1/8") orifice. 60 metre water throw at 7 bar
- All s/s fasteners and protective cabinet components
- 12 month product warranty
- Spare parts readily available
- Fully serviceable

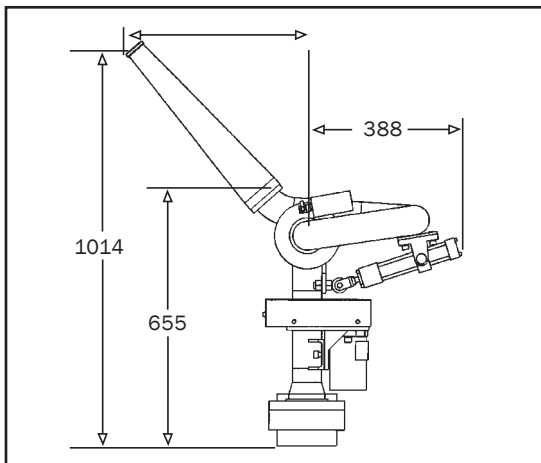

hydraulic driven remote monitor RM80